


Product Data Sheet

Servo Super 20W-40 MG Multigrade Diesel/Petrol Engine Oil

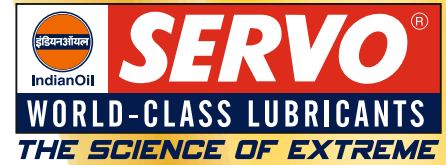

Description

Servo Super 20W-40 MG is blended from highly refined base stocks and balanced additive package containing shear stable VI improver, metallic detergent and dispersant. Servo Super 20W-40 MG is suitable for all seasons.

Performance, Features and Benefits

- Enable easy low temperature starting
- Provide maximum protection to engine parts against rust and corrosion
- Give good high and low temperature performance in the engine
- Minimize wear of engine parts
- Ensure system cleanliness by holding contaminants in finely dispersed state

Application

Servo Super 20W-40 MG is recommended for naturally aspirated diesel engines and older gasoline engines. The oil is suitable for BS I/II vehicles.

Approvals / Performance Standards / Recommendations

- Meets API CF/SF, Type E-PL2/E-DL2 of IS:13656-2019

Typical Physical Characteristics

Properties	Method	Value
Appearance	Visual	Clear
Colour	ASTM D1500	Red
Flash point COC, °C	ASTM D92	215
Pour point, °C	ASTM D97	-21
Kinematic viscosity at 100°C, cSt	ASTM D445	13.83
Viscosity Index	ASTM D2270	117
CCS @ -15°C mPa.s	ASTM D5293	7832
Total base number , mg KOH/g	ASTM D2896	5.21
Foam test; Tend/Stab, ml		
Seq. I		0/nil
Seq. II	ASTM D892	10/nil
Seq. III		0/nil
Sulfated ash, % wt	ASTM D874	0.740

Health, Safety & Environment

Based on available information, this product is not expected to produce adverse effects on health when used for the intended application and the recommendations provided in the Material Safety Data Sheet (MSDS) are followed. MSDS's are available upon request through your sales contract office, or at <https://cx.indianoil.in/>. This product should not be used for purposes other than its intended use. If disposing of used product, take care to protect the environment.

15 JUL 2022

All trademarks used herein are trademarks or registered trademarks of Indian Oil Corporation or one of its subsidiaries unless indicated otherwise. Values reported are typical of those obtained with normal production tolerance, and may vary from batch to batch. Due to continual product research and development, the information contained herein is subject to changes without notification. Material Safety Data Sheets are available for all our products and should be consulted for appropriate information regarding storage, safe handling, and disposal of the product. All products, services and information supplied are provided under our standard conditions of sale.

For further information, please contact our nearest office or:

Technical Services Department,
Indian Oil Corporation Ltd.,
G-9, Ali Yavar Jung Marg, Bandra (E),
Mumbai – 400051

E-Mail: servotechserv@indianoil.in or
servots@indianoil.in | <https://cx.indianoil.in/>